

FULL MORTISE TEMPLATE PIVOT REINFORCED HINGES WITH 4" DOOR PLATE FOR DOORS WITH BEVELED EDGE HINGE STILES

Size: 5 x 4 1/2"

**TOP HINGE - RIGHT HAND SHOWN
LEFT HAND IS OPPOSITE**

For use with door holders, closers and operators which interfere with standard door plates shown on template T50-09.


SET CLASS NO.		
Steel	Nonferrous	Gauge of Metal
CB213 with 4 door plate	CB223 with 4 door plate	0.190
FBB213 with 4 door plate	FBB223 with 4 door plate	0.190
CB1909 with 4 door plate	CB1969 with 4 door plate	0.190
CB1909R with 4 door plate	CB1969R with 4 door plate	0.190

Machine Screw Size — 1/2 x 12-24 F.H.
Wood Screw Size — 1 1/2 x No. 12 F.H.

NOTE: Backsets which apply when pivot-reinforced hinge is used on door thickness indicated and when the usual 1/16 stop clearance is desired.


Door Thickness	*Backset on Door	*Backset on Frame
1 3/4	1/4	5/16
2	1/2	9/16
2 1/4	3/4	13/16

***CAUTION:** These backsets must be used on ALL hinges in set.

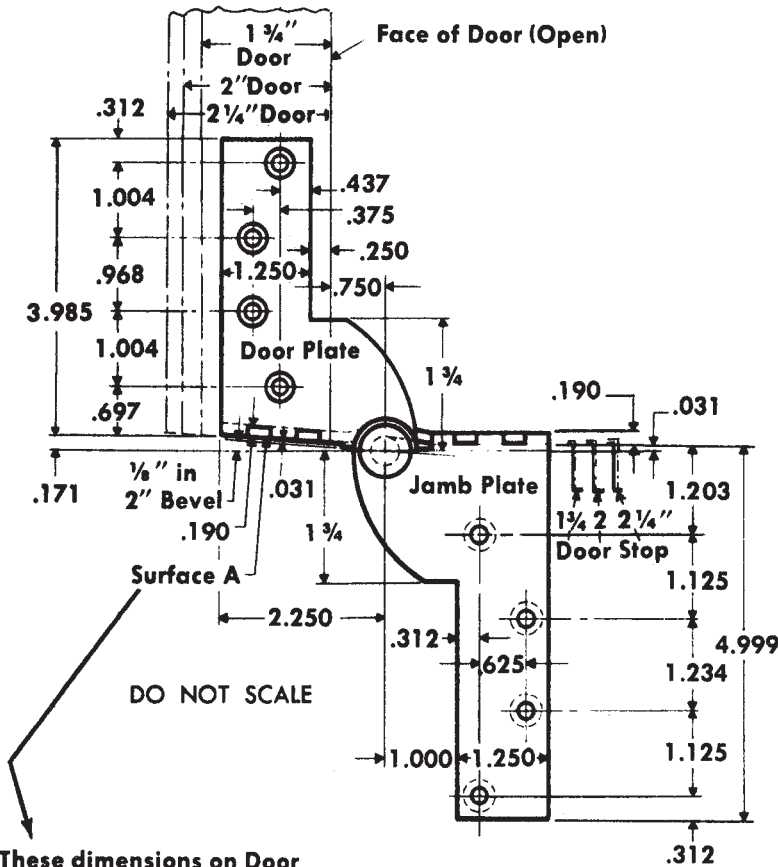


DO NOT SCALE

These dimensions on Door Leaf are to be measured along Surface A

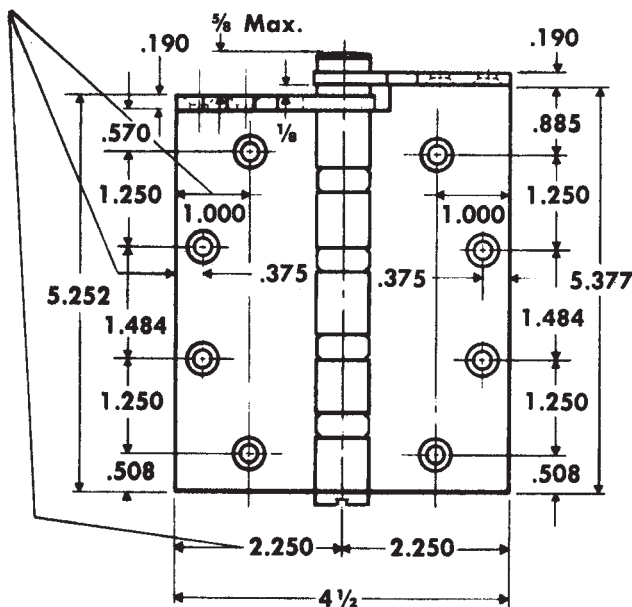

CENTER AND BOTTOM HINGES

Size — 5" x 4 1/2"
Gauge of Metal — .190

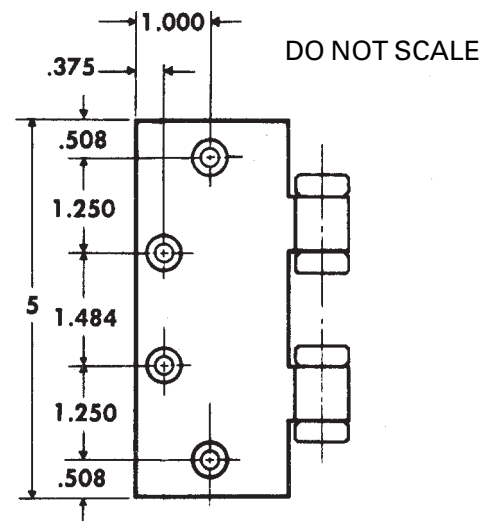

Machine Screw Size — 1/2 x 12-24 F.H.
Wood Screw Size — 1 1/2 x No. 12 F.H.